

# OTTOSEAL® M361

## The professional sealant with structure

OTTO product tip!



- ✔ **Structured look**
- ✔ Can be painted over
- ✔ Silicone-free
- ✔ RAL assembly

### Applications

- ✔ Building construction joints in accordance with DIN 18540-F
- ✔ Sealing of joints on facades, metal constructions



### Perfect look with structure

Thanks to its granular structure, OTTOSEAL® M361 blends in perfectly with the plaster structure of a facade, guaranteeing a uniform overall result.

For information relating to certification marks, please see [www.otto-chemie.com](http://www.otto-chemie.com) under the heading „Information on Certification Marks“. The requirements and test criteria of the DGNB and LEED can be found on [www.dgnb.de](http://www.dgnb.de) and [www.german-gba.org](http://www.german-gba.org). Please note that these companies do not evaluate our individual products, but the sustainability as a whole of each complete building project.

The information in the present document corresponds to the status quo on going to print, refer to the index. With a new edition this edition becomes invalid. Due to the many possible influences during and after application, the customer always has to carry out trials first. Please observe the respective technical data sheet! This information is available on the Internet at [www.otto-chemie.com](http://www.otto-chemie.com). Errors and typographical errors are excepted.

**Hermann Otto GmbH**  
Krankenhausstr. 14  
83413 Fridolfing, Germany  
Tel.: +49 8684 908-0  
[info@otto-chemie.com](mailto:info@otto-chemie.com)  
[www.otto-chemie.com](http://www.otto-chemie.com)



OTTO product information

# OTTOSEAL® M360

## The hybrid sealant for building joints

Quality creates cohesion

- ✔ **Can be painted over**
- ✔ Silicone-free
- ✔ Durable and robust joint
- ✔ RAL assembly

Index: 9999439-GB | 21.09.2021 | © Hermann Otto GmbH 2021



# The professional sealant for internal and external use

## 1-component hybrid polymer STP sealant

for indoor and outdoor application



### Perfect for building construction and expansion joints

Thanks to its quick, shrinkage-free and bubble-free curing and its paintability, silicone-free hybrid sealant OTTOSEAL® M360 guarantees an optimal result for different building construction and expansion joints indoors and outdoors – for a long time. The sealant is also ideal for closing cracks and holes in facades and interior walls, such as in scaffolding and paintwork. In addition, the sealant is ideal for connections to structures or for connection joints between windows and facades.



### Sprayable sealant system for RAL assembly

OTTOSEAL® M360 is ideally suited for RAL assembly of windows and door elements. It can also be used for indoor and outdoor sealing.



Can be painted over



Silicone-free



Durable and robust joint



RAL assembly



Building construction joints in accordance with DIN 18540-F



Sealing of joints on facades, metal constructions



Expansion joints on pre-fabricated concrete and cellular concrete units



Bonding of OTTO Window Tapes



Sealing of connection joints on construction elements




- ✓ Silikonfrei
- ✓ Langlebige und robuste Fuge
- ✓ RAL-Montage



## The applications at a glance



Building construction joints in accordance with DIN 18540-F

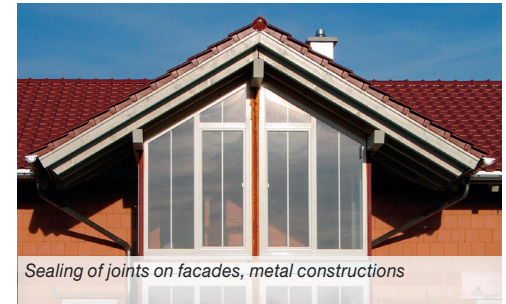

Sealing of joints on facades, metal constructions



Expansion joints on prefabricated concrete and cellular concrete units



### Find out more about OTTOSEAL® M360

You can find more information about the product on our website [www.otto-chemie.com](http://www.otto-chemie.com) or in the OTTO app.

